

## Meclube Model P7

Made of POLYPROPYLENE


Compression ratio: 1:1  
 Max flow-rate: 7 l/min  
 Fluid connections: 1/4" BSP



EX II 3/3 GD h IIB T4 135°C ATEX zone2

ARTICLE	CASING	DIAPHRAGM	BALLS	GASKET	FLUIDS
028-P007-AB1	POLYPROPYLENE	NBR+PTFE	SS AISI 316	NBR	oil-exhausted oil-diesel fuel
028-P007-AB2	POLYPROPYLENE	NBR+PTFE	PTFE	VITON	water-anti-freeze-windscreen-urea-AdBlue
028-P007-AB3	POLYPROPYLENE	NBR+PTFE	PTFE	PTFE	aggressive fluids (acids and basics)


### Performance

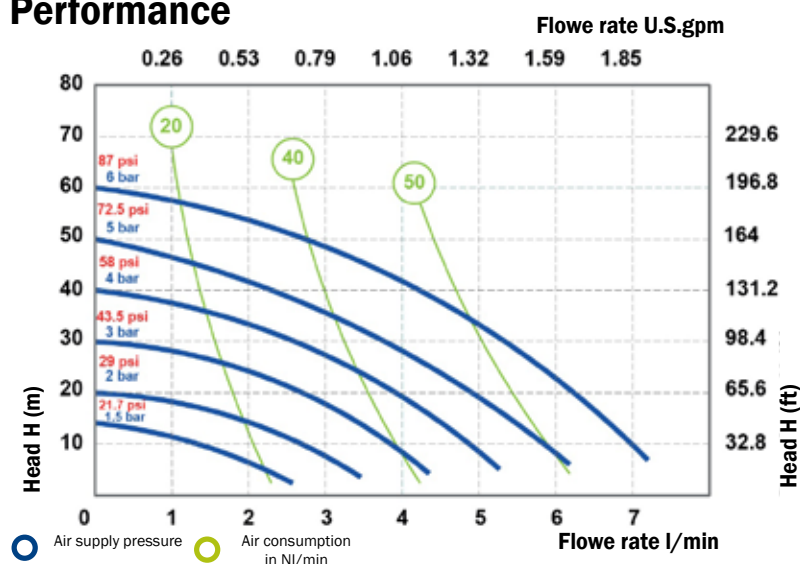

The curves and performance values refer to pumps with submerged suction and a free delivery outlet with water at 20 °C, and vary according to the construction material.

### Technical data

Fluid connections: 1/4" BSP  
 Air connection: 4 mm  
 Max flow-rate: 7 l/min  
 Max air pressure: 6 bar  
 Max delivery head: 60 m  
 Max Suction Lift Dry: 3,0 m  
 Max Suction Lift Wet: 9,8 m  
 Max Solid passing: 2 mm  
 Noise level: 62 dB  
 Displacement per cycle: 18 cm<sup>3</sup>  
 Max Viscosity: 5000 cps

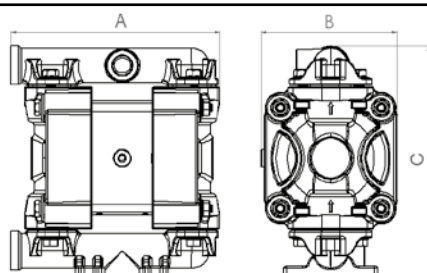

### Dimensions

#### P7

A (mm) 129  
 B (mm) 68  
 C (mm) 112  
 Gross weight kg 0,91  
 MAX Temperature -4 °C + 65 °C