

Meclube Model P110

Made of POLYPROPYLENE


Compression ratio: 1:1
 Max flow-rate: 110 l/min
 Fluid connections: 3/4" BSP



EX II 3/3 GD h IIB T4 135°C ATEX zone2


ARTICLE	CASING	DIAPHRAGM	BALLS	GASKET	FLUIDS
028-P110-AB1	POLYPROPYLENE	HYTREL	SS AISI 316	NBR	oil-exhausted oil-diesel fuel
028-P110-AB2	POLYPROPYLENE	HYTREL+PTFE	PTFE	VITON	water-anti-freeze-windscreen-urea-AdBlue
028-P110-AB3	POLYPROPYLENE	HYTREL+PTFE	PTFE	PTFE	aggressive fluids (acids and basics)
028-P110-AB4	POLYPROPYLENE	SANTOPRENE	EPDM	EPDM	abrasive liquids - alkaline/basic

Performance

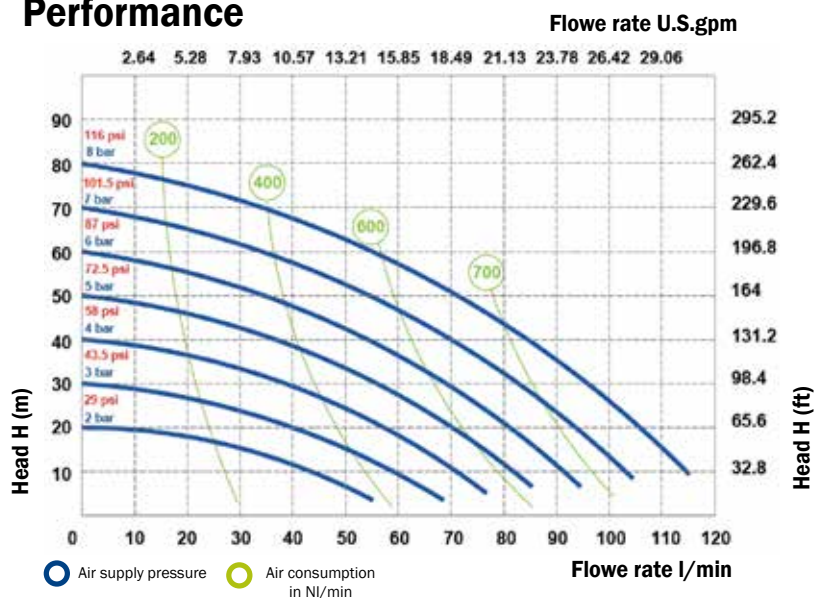

Technical data

Fluid connections: 3/4" BSP
 Air connection: 3/8" BSP
 Max flow-rate: 110 l/min
 Max air pressure: 8 bar
 Max delivery head: 80 m
 Max Suction Lift Dry: 5,0 m
 Max Suction Lift Wet: 9,8 m
 Max Solid passing: 4 mm
 Noise level: 72 dB
 Displacement per cycle: 200 cm³
 Max Viscosity: 25000 cps

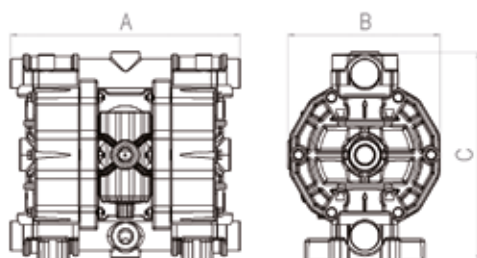

Dimensions

P110

A (mm) 293
 B (mm) 176
 C (mm) 280
 Gross weight kg 5,10
 MAX Temperature -4°C + 65°C