


A black and silver electric pump unit, likely for a swimming pool. It features a black plastic housing on top and a silver metal body with vertical cooling fins. A black power cord is attached to the top, ending in a standard two-prong electrical plug. The pump has a circular outlet on the front and a smaller inlet on the side. A warning label is visible on the top black housing.

Power cable 2 m lenght, Schuko plug
Self-priming rotary electric pump
Cast iron body
By-pass valve
AC Engine
Stainless steel filter 100 micron
Motor protection rating IP55

Ref.	Flow rate	Voltage	Power	Electricity	Lenght Cable	Inlet-outlet	Duty cycle	Weight	Packaging
	l/min	AC V./Hz	W	A	m	BSPG	min	kg	mm

091-5095-060	60	230/50	460	1,95	2	F 1"-F 1"	Contin.	7,60	250X195X210
---------------------	-----------	--------	-----	------	---	-----------	---------	------	-------------

Dimensions:

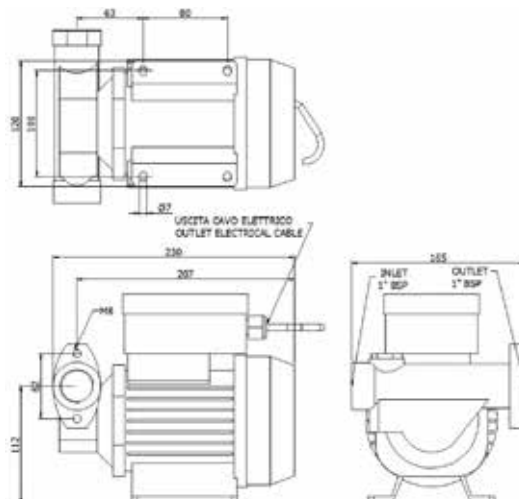

ELECTRIC PUMPS FOR DIESEL FUEL TRANSFER

Electric pumps 115 - 230V - 400V, volumetric self-priming vane. They are equipped with asynchronous induction self-ventilated with motor protection rating IP55, insulation class type F, internal protection. Built-in by-pass valve and stainless steel filter.



Electric pump 70 I for diesel fuel transfer equipped with:

Power cable 2 m length, Schuko plug

Self-priming rotary electric pump

Cast iron body

By-pass valve

AC Engine

Stainless steel filter 100 micron

Motor protection rating IP55


Ref.	Flow rate	Voltage	Power	Electricity	Cable length	Inlet-outlet	Duty cycle	Weight	Packaging
	l/min	AC V./Hz	W	A	m	BSPG	min	kg	mm

091-5098-070	70	230/50	552	2,9	2	F 1"-F 1"	Contin.	8,60	300X215X230
--------------	----	--------	-----	-----	---	-----------	---------	------	-------------

091-5099-070	70	115/60	575	6	2	F 1"-F 1"	Contin.	8,60	300X215X230
--------------	----	--------	-----	---	---	-----------	---------	------	-------------

091-5097-070	70	400/50	304	1,1	2	F 1"-F 1"	Contin.	9,00	300X215X230
--------------	----	--------	-----	-----	---	-----------	---------	------	-------------

Dimensions:

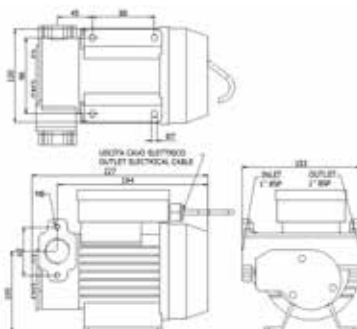

ELECTRIC PUMPS FOR DIESEL FUEL TRANSFER



Electric pump 115 o 230V, volumetric self-priming vane. They are equipped with asynchronous induction self-ventilated engine with motor protection rating IP55, insulation class type F, internal protection. Built-in by-pass valve and stainless steel filter.



Electric pump 100 l for diesel fuel transfer equipped with:

Power cable 2 m length, Schuko plug

Self-priming rotary electric pump

Cast iron body

By-pass valve

AC engine

Stainless steel filter 100 micron


Motor protection rating IP55

Ref.	Flow rate	Voltage	Power	Electricity	Cable length	Inlet-outlet	Duty cycle	Weight	Packaging
	l/min	AC V./Hz	W	A	m	BSPG	min	kg	mm

091-5100-100	100	230/50	805	4,5	2	F 1"-F 1"	Contin.	14,00	300X215X230
--------------	-----	--------	-----	-----	---	-----------	---------	-------	-------------

091-5101-100	100	115/60	977	8,5	2	F 1"-F 1"	Contin.	14,00	300X215X230
--------------	-----	--------	-----	-----	---	-----------	---------	-------	-------------

Dimensions:

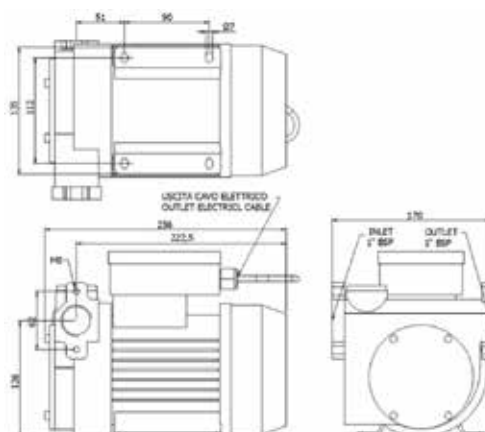

Electric pumps 230V, volumetric self-priming vane. They are equipped with asynchronous induction self-ventilated with motor rate protection IP55, insulation class type F, internal protection. Built-in by-pass valve and stainless steel filter.



Electric pump 150 l for diesel fuel transfer equipped with:

Power cable 2 m length, Schuko plug

Self-priming rotary electric pump

Cast iron body

By-pass valve

AC Engine

Stainless steel filter 100 micron

Motor protection rating IP55

Ref.	Flow rate	Voltage	Power	Electricity	Cable length	Inlet-Outlet	Duty cycle	Weight	Packaging
	l/min	AC V./Hz	W	A	m	BSPG	min	kg	mm

091-5100-150	150	230/50	1725	14,5	2	F 1" - F 1"	S2 30 min	16,70	290X190X250
--------------	-----	--------	------	------	---	-------------	-----------	-------	-------------

Dimensions:

