




MODEL NO	PASLANMAZ (STAINLESS)	SİYAH (BLACK)	F1 (N)	F3 (N)	STROK (DİŞ BOYU) (STROKE) (thread length)	AĞIRLIK (WEIGHT) (gr ±%)
311 - 1	S 311 -	B 311 -	1000	1500	45	135
311 - 2	S 311 -	B 311 -	1500	2000	45	175
311 - 3	S 311 -	B 311 -	2200	3200	75	335
311 - 4	S 311 -	B 311 -	7000	8000	95	815
311 - 5	-	B 311 -	10000	11000	110	945

F1 : BASKI KUVVETİ (EXERTING FORCE) , F3 : TUTMA KAPASİTESİ (HOLDING CAPACITY)
Paslanmaz U Kancalı ürünlerin çekme kuvvetleri %30 daha azdır. (Stainless stell latch clamp's tensile strength are %30 more less)


311

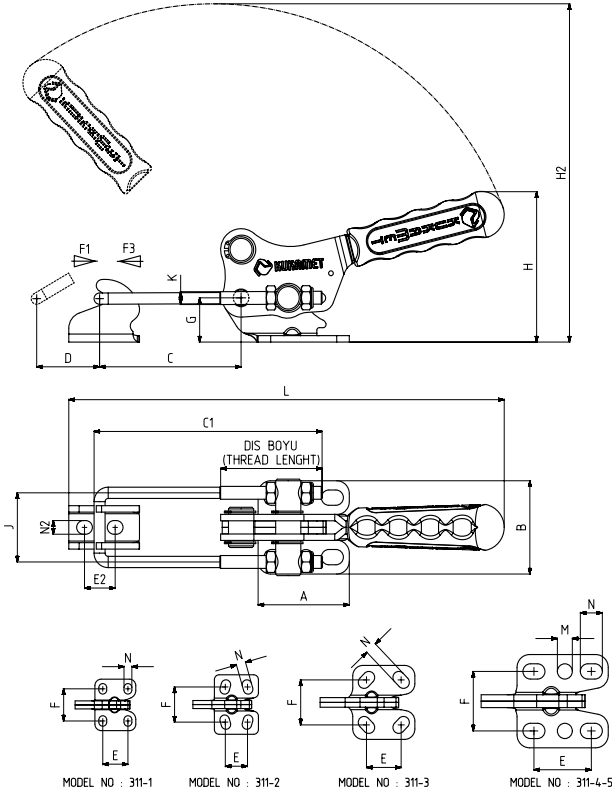

Ayak Tipi: Yatay Tabanlı
Body Mounting Base: Horizontal



MODEL NO	A	B	C min.	C max.	C1	D	E	E2	F	G	H	H2	J	K	L min.	L max.	M	N	N2
311 - 1	26	32	35	65	90	20	16	10	20	13	55	110	23	M4	135	165	-	5x6,5	Ø 5
311 - 2	28	37	32	62	90	25	14	12	22	17	58	120	23	M4	142	172	-	6 x 9	5,5 x 7,5
311 - 3	39,5	46	32	67	105	35	22	16	28	21,5	67	160	30	M 6	177	212	-	7,5x11,5	Ø 6,5
311 - 4	58	58	45	95	145	44	36,5	19,5	37	27,5	91	200	43	M8	233	282	Ø 9,5	9,5x14	8,5x10
311 - 5	58	58	45	127	180	44	36,5	19,5	37	27,5	93,5	204,5	45	M10	233	315	Ø 9,5	9,5x14	8,5x10

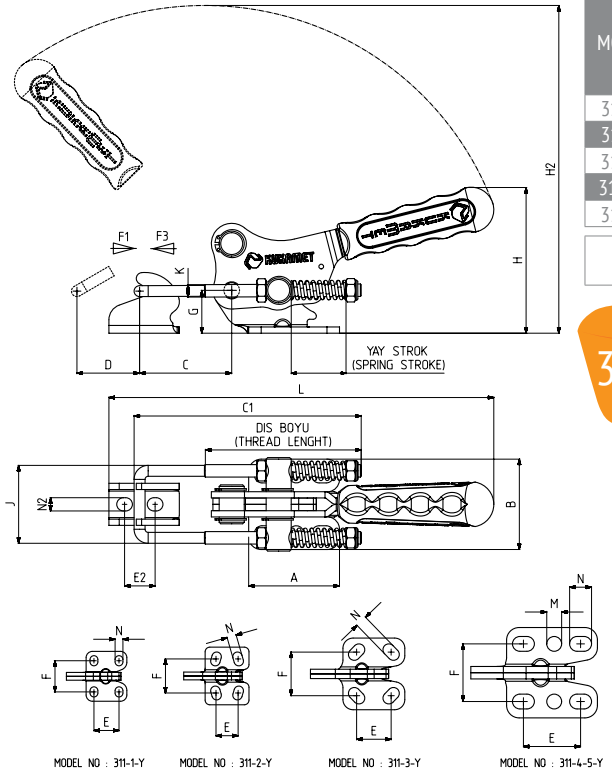

311-Y



Ayak Tipi: Yatay Tabanlı-Yaylı
Body Mounting Base: Horizontal -
With Spring

MODEL NO	PASLANMAZ (STAINLESS)	SİYAH (BLACK)	F1 (N)	F3 (N)	STROK (DİŞ BOYU) (STROKE) (thread length)	YAY STROK (SPRING STROKE)	AĞIRLIK (WEIGHT) (gr ±%)
311 - 1 - Y	S 311 -	B 311 -	150	225	45	9	140
311 - 2 - Y	S 311 -	B 311 -	150	225	45	9	180
311 - 3 - Y	S 311 -	B 311 -	220	325	75	10,5	341
311 - 4 - Y	S 311 -	B 311 -	350	525	95	13	830
311 - 5 - Y	-	B 311 -	500	725	110	19	980

F1 : BASKI KUVVETİ (EXERTING FORCE) , F3 : TUTMA KAPASİTESİ (HOLDING CAPACITY)
Paslanmaz U Kancalı ürünlerin çekme kuvvetleri %30 daha azdır. (Stainless stell latch clamp's tensile strength are %30 more less)



MODEL NO	A	B	C min.	C max.	C1	D	E	E2	F	G	H	H2	J	K	L min.	L max.	M	N	N2
311 - 1 - Y	26	32	35	41	90	20	16	10	20	13	55	110	23	M4	135	140	-	5x6,5	Ø 5
311 - 2 - Y	28	37	33	37,5	90	25	14	12	22	17	58	120	23	M4	143,5	147,5	-	6 x 9	5,5 x 7,5
311 - 3 - Y	39,5	46	17	42	105	35	22	16	28	21,5	67	160	30	M 6	160,5	185,5	-	7,5x11,5	Ø 6,5
311 - 4 - Y	58	58	30	60,5	145	44	36,5	19,5	37	27,5	91	200	43	M8	217	246,5	Ø 9,5	9,5x14	8,5x10
311 - 5 - Y	58	58	51,5	81,5	180	44	36,5	19,5	37	27,5	93,5	204,5	45	M10	238,5	268,5	Ø 9,5	9,5x14	8,5x10

C Ölçüsü Kısa U Kanca İçindir. Bkz. Aksesuar Sayfası. / C Dimension is for short U Hook. Please See Accessories Page.