



HIGH TEMP EZS2 Secondary Cleaner

The Economical, Efficient Belt Cleaning Solution

The High Temp EZS2 Secondary Belt Cleaner improves belt cleaning efficiency and reduces routine maintenance tasks in environments up to 400° F (204° C) or spikes up to 450° F (232° C). And it does all of this at an affordable price. Add easy, do-it-yourself installation and it makes an unbeatable solution for your conveyor belt cleaning needs.

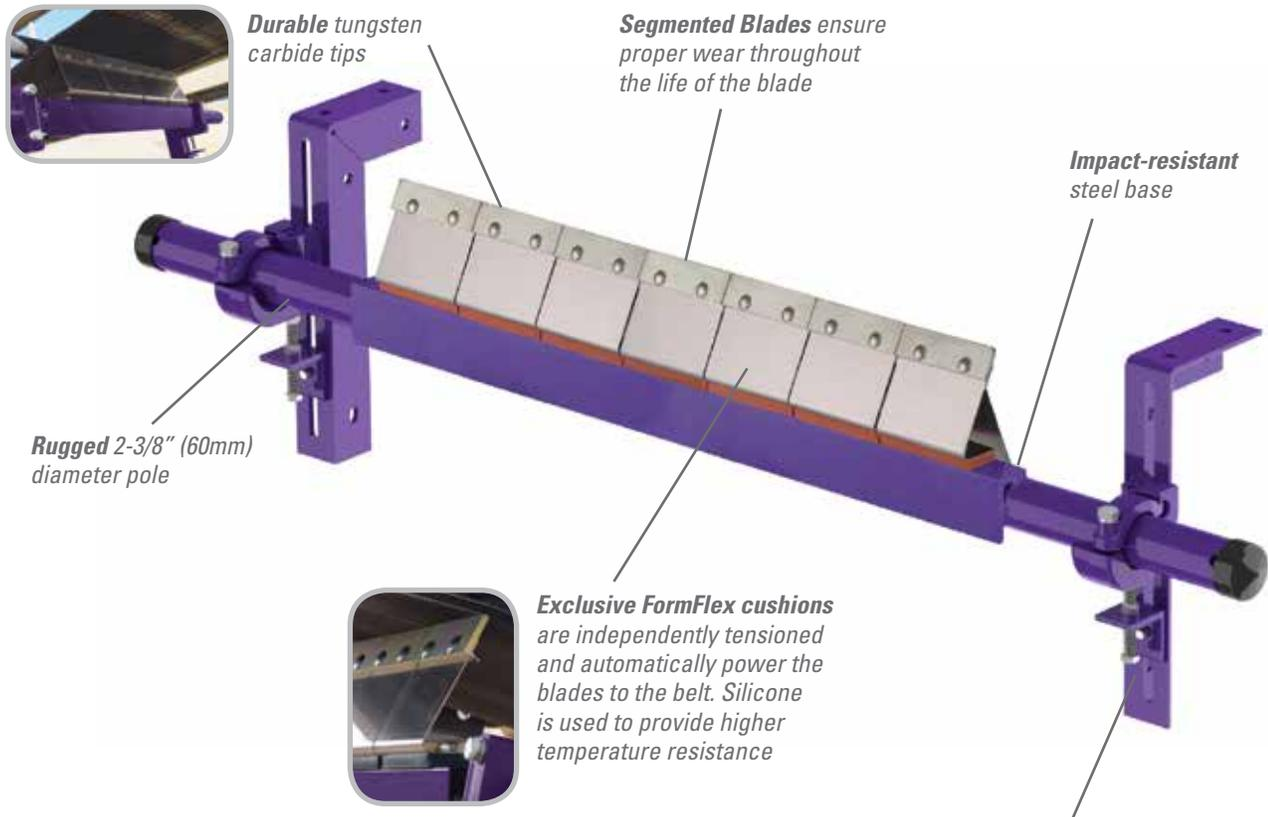

Versatile tensioner kit can be mounted to push-up or pull-up the cleaner

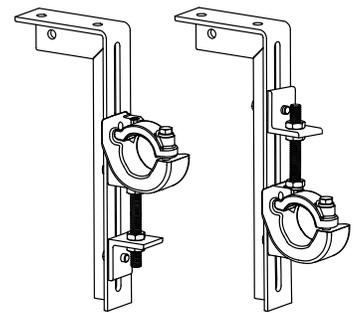

Features and Benefits


- **Cleaning efficiency of metal blades.** The thin, hard edges of the metal blades deliver high cleaning efficiency and long wear life.
- **Works with Flexco mechanical splices.** The tungsten carbide-tipped blades are impact-resistant, and the spring cushion allows them to move away from a passing splice without damage and with minimal cleaning disruption.
- **A complete cleaning system.** When the High Temp EZS2 is teamed with the High Temp EZP1, the system proves maximum cleaning power for tough high temperature applications.
- **Fits most conveyor structures.** Available for belt widths from 18" to 72" (450mm to 1800mm).

HIGH TEMP EZS2


Secondary Cleaner

Specifications and Guidelines

- **Maximum Belt Speed**
700 FPM (3.5M/sec)
- **Max Temperature Rating**
-30° F to 400° F (-35° C to 204° C)
- **Pole Length**
Blade width + 34" (850mm)
- **Maximum Conveyor Span**
Blade width + 29" (725mm)

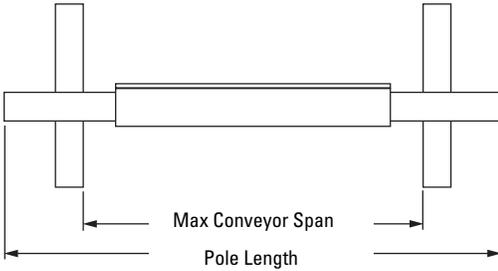

- **Blade Material**
Impact Resistant Tungsten Carbide (works with mechanical fasteners)
- **Usable Blade Wear Length**
3/8" (9mm)

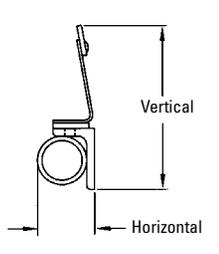

- **Available for Belt Widths**
18" to 72" (450 to 1800mm)
- **Horizontal Clearance Required**
4" (100mm)
- **Vertical Clearance Required**
8-1/2 - 9-1/2" (213-238mm)

Ordering Information

High Temp Secondary Cleaner with C-Tips			
Belt Width		Ordering Number	Item Code
in.	mm		
18	450	HTS18	76085
24	600	HTS24	76086
30	750	HTS30	76087
36	900	HTS36	76088
42	1050	HTS42	76089
48	1200	HTS48	76090
54	1350	HTS54	76091
60	1500	HTS60	76092
72	1800	HTS72	76093

Pole Diameter - 2-3/8" (60mm)
Lead time: 1 working day

Replacement C-Tips	
Ordering Number	Item Code
ICT6	74535

Lead time: 1 working day

Replacement Cushion Kit	
Ordering Number	Item Code
HTSCK	76094

Lead time: 1 working day

Tips Required per Cleaner Size									
in.	18	24	30	36	42	48	54	60	72
mm	450	600	750	900	1050	1200	1350	1500	1800
C-Tips Required	3	4	5	6	7	8	9	10	12

Additional Information

For standard applications, see the EZS2 Sell Sheet (X2396).



Authorized Distributor:

2525 Wisconsin Avenue • Downers Grove, IL 60515-4200 • USA
Tel: (630) 971-0150 • Fax: (630) 971-1180 • E-mail: info@flexco.com

Visit www.flexco.com for other Flexco locations and products.

©2014 Flexible Steel Lacing Company. Rockline® is a registered trademark. 04/14. For reorder: X2502

